

## CU3030 - 300lb Self-Contained Ice Machine

Prodigy® Undercounter Cuber with Storage



WaterSense Adaptive Purge Control

### Features & Benefits

- Prodigy® undercounter cubers use significantly less energy and water than other cube ice machines, exceeding Federal energy efficiency regulations.
- AutoAlert™ control panel can communicate operating status and signal when it's time to descale, sanitize and more- making upkeep easier.
- The patented WaterSense adaptive purge control delivers maximum reliability by reducing scale buildup for a longer time between cleanings.
- All external panel components are crafted for optimal aesthetic appeal through superior fit and finish.
- Preventative maintenance is simpler than ever with easily-removed door, top panel and storage bin allowing clear access to all internal components and a diagnostic code display insuring the right fix the first time.
- Includes ice scoop, 6" adjustable legs and 6' power cord.

### 24 Hour Volume Production

Air Cooled			Water Cooled		
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C
329/150 lb/kg		230/105 lb/kg	363/165 lb/kg		280/127 lb/kg



#### Cube Ice

Common ice form, ideal for mixed drinks.



Small Cube  
7/8" x 7/8" x 3/8"  
(2.22 x 2.22 x .95 cm)



Medium Cube  
7/8" x 7/8" x 7/8"  
(2.22 x 2.22 x 2.22 cm)



#### Certification




#### Warranty

- 3 Years parts and labor on all components.
- 5 Years parts and labor on the evaporator.
- 5 Years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor

## CU3030 - 300lb Self-Contained Ice Machine

Prodigy® Undercounter Cuber with Storage

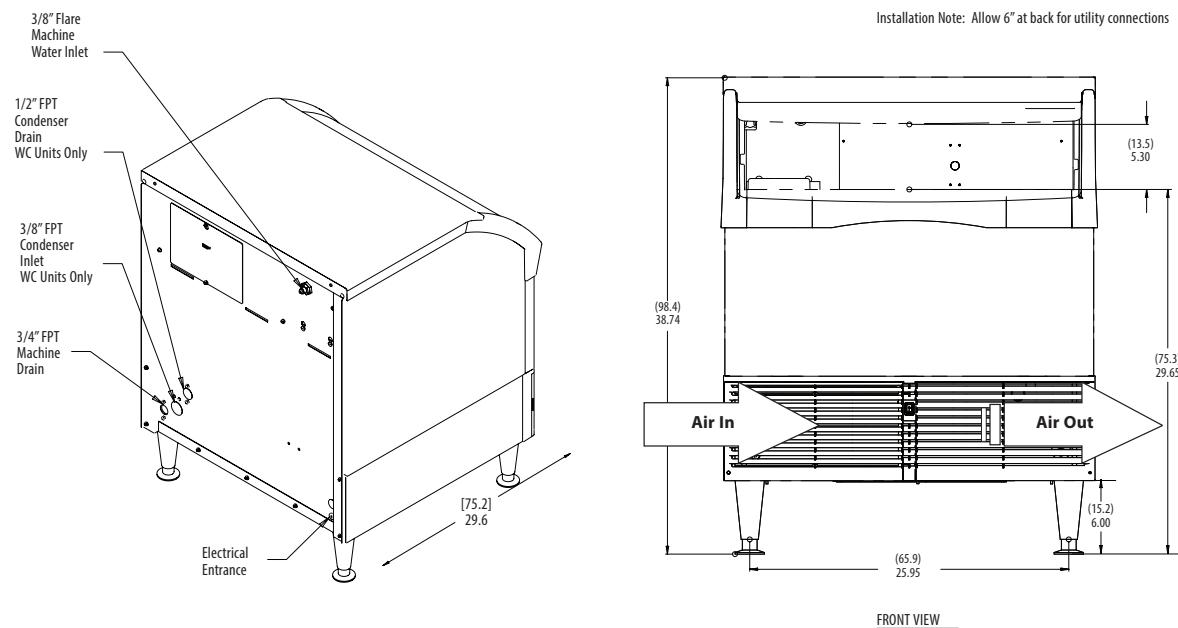

### Specifications

Model Number*	Condenser Unit	Storage lb/kg	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Water Usage		
							kWh/100 lb (45.4 kg)	90°F(32°C)/70°F(21°C)	Gallons/100 lb (liters/45.4 kg)
Potable	Condenser	90°F(32°C)/70°F(21°C)							
CU3030MAX-1	Air	110/50	115/60/1	15	2	Cord	6.72	20.4/77.3	-
CU3030MAX-32	Air	110/50	208-230/60/1	15	2	Cord	6.72	20.4/77.3	-
CU3030SAX-1	Air	110/50	115/60/1	15	2	Cord	6.72	20.4/77.3	-
CU3030SAX-32	Air	110/50	208-230/60/1	15	2	Cord	6.72	20.4/77.3	-
CU3030SWX-1	Water	110/50	115/60/1	15	2	Cord	4.75	20.4/77.3	139/528



### All Models

#### Dimensions (W x D x H):

Unit: 30" x 30" x 33"  
(76.2 x 76.2 x 83.8 cm)

Shipping Carton: 33" x 33" x 39.5"  
(83.8 x 83.8 x 100.3 cm)

Shipping Weight: 230 lb / 104 kg  
BTUs per hour: 5,200

Model Number	Refrigerant	Refrigerant Charge (oz)
CU3030MAX-1	R290	5.25
CU3030MAX-32	R290	5.25
CU3030SAX-1	R290	5.25
CU3030SAX-32	R290	5.25
CU3030SWX-1	R290	5.25



### Accessories

Model Number	Description
KLP8S	Kit 6 inch leg SS
KPUFM30	Kit Prodigy undercounter floor mount 30 inch for CU3030 (add .5" to height)

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



### Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.