

Probisy

Scotsman

### N1322 - 1300lb Nugget Ice Machine

Prodigy Plus<sup>®</sup> Nugget Ice Machine

### Superior performance with every cup.

Now the soft, chewable nugget ice that customers love is available with more innovative technology than ever before. With next-generation diagnostics like AutoAlert<sup>™</sup> indicator lights on the new Scotsman Prodigy Plus® nugget ice machines, operators can help ensure superior performance while enjoying maximum efficiency every day. And with features like advanced ice level control, a small operational footprint and easy-access service from the front panel, Prodigy Plus<sup>®</sup> nugget ice machines are the smart choice for today's busy food-service environments.



- The Original Chewable Ice®
- AutoAlert<sup>™</sup> indicator lights for better visibility
- Operational footprint among the industry's smallest
- Industry-exclusive QR code instantly connects users to service information and warranty history
- Front-located air filter for more efficient operation
- Self-aligning front panel for easy access to key components • Smart-Board<sup>™</sup> advanced feature module available for additional diagnostic
- capabilities • Optional Vari-Smart<sup>™</sup> ice level control allows operators to customize ice levels
- Antimicrobial protection guards internal surfaces between cleanings
- A full range of water- and energy-saving features

## 24 Hour Volume Production

Air Cooled			Ren	Remote Cooled			Water Cooled		
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	
1385/630 lb/kg		990/450 lb/kg	1360/618 lb/kg		1061/482 lb/kg	1513/688 lb/kg		1129/513 lb/kg	

Modular Bin & Dispenser Options




N1322 side by side on B948S

# **Nugget Ice**

The Original Chewable Ice™! Soft ice ideal for fountain beverages and blended fruit drinks.

**Scotsman**<sup>®</sup>

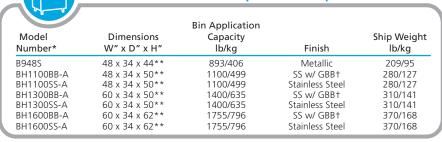

\*Contact Scotsman for bin top requirements. \*\*Add 6" Height for bin legs. † Stainless steel with galvanized back & bottom





Warranty


for commercial installations.

• 1-800-SCOTSMAN • Fax: 847-913-9844 • www.scotsman-ice.com • customer.relations@scotsman-ice.com •

America

### N1322 - 1300lb Nugget Ice Machine

Prodigy Plus<sup>®</sup> Nugget Ice Machine

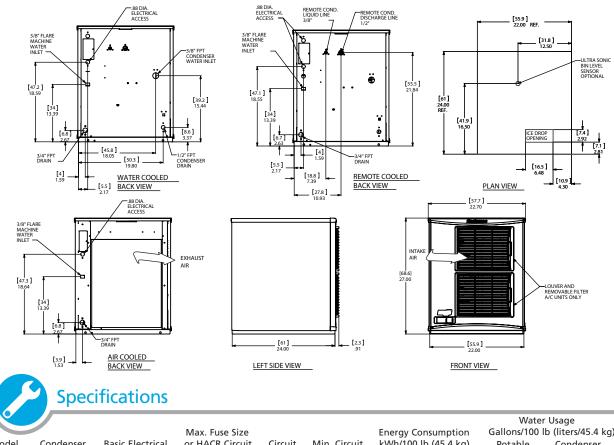

			Max. Fuse Size			Energy Consumption	Gallons/100 lb (liters/45.4 kg)	
Model Number	Condenser Unit	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C	Condenser C)/70°F(21°C)
N1322A-32	Air	208-230/60/1	30	2	19.1	4.04	12.0/45.5	-
N1322R-32	Remote	208-230/60/1	30	2	18.4	3.92	12.0/45.5	-
N1322W-32	Water	208-230/60/1	30	2	17.9	3.19	12.0/45.5	78/295.7
N1322W-3	Water	208-230/60/3	15	3	11.2	3.19	12.0/45.5	78/295.7

Dimensions (W x D x H):					
Unit:	Individual 22.9" x 24" x 27" (58.2 x 61.0 x 68.6 cm)				
	Side by Side 44" x 24" x 27" (111.8 x 61.0 x 68.6 cm)				
Shipping Carton:	25.5" x 27.5" x 32.5" (64.8 x 69.9 x 82.6 cm)				
Shipping Weight: 225 lb / 102 kg	BTUs per hour: 16,000				
Refrigerant: R-40	4A				

• 1-800-SCOTSMAN • Fax: 847-913-9844 • www.scotsman-ice.com • customer.relations@scotsman-ice.com •

**IH** 

© 2019 Scotsman Ice Systems.



Model Number	Description
KVS	Vari-Smart <sup>™</sup> Ice Level Control - Program ice bin levels to match ice needs.
KSBU	Smart-Board <sup>™</sup> Advanced Control - Use additional operational data for fast diagnosis.
KSBU-N	Smart-Board <sup>™</sup> Advanced Control with Network - Network capable.
ERC311-32A	Remote condenser for N1322R, 208-230V/60/1
BRTE10	Line set, 10ft, brazing required.
BRTE25	Line set, 25ft, brazing required.
BRTE40	Line set, 40ft, brazing required.
BRTE75	Line set, 75ft, brazing required.
KPAS	Prodigy Advanced Sustainability Kit - Includes KVS and KSBU - N

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

### **Operating Requirements** Minimum Maximum 50°F (10°C) 100°F (38°C) Air Temperatures Water Temperatures 40°F (4.4°C) 100°F (38°C) Remote Cond. Temps -20°F (-29°C) 120°F (49°C) Water Pressures 20 PSIG (1.4 bar) 80 PSIG (5.5 bar) Electrical Voltage -5% +10%

Specifications and design are subject to change without notice.

