



UC0918 - 90 lb Self-Contained Ice Machine

Self-Contained Under Counter Cuber with Storage



Features and Benefits

Quality Ice:

- Unique evaporator produces crystal clear gourmet cubes

Reliability:

- 3 Year parts and labor warranty
- Corrosion resistant exterior

Ease of Use:

- Slide back door allows easy access to ice in the bin
- Removeable air filter
- Ice scoop included

Compact Design:

- Only 18" wide, the ice maker can be placed in the tightest locations

High Production:

- Produces up to 95lb (43kg) per day and stores 33lb (15kg), meeting the ice demands for many different applications

Environmentally Friendly:

- Meets US federal energy efficiency requirements
- Meets US Safe Drinking Act low lead requirements
- R290A refrigerant meets new EPA requirements



ADA Compliant

Height reduces to 27" without legs



24 Hour Volume Production

Air Cooled

70°F/21°C	Air	90°F/32°C
50°F/10°C	Water	70°F/21°C

95/43	78/35
lb/kg	lb/kg



Gourmet Ice



Large, slow-melting ice form, ideal for mixed drinks.

Cube Dimensions
1" x 1 1/8" x 1 1/4"
(2.54 x 2.86 x 3.18 cm)



Certification



Warranty

- 3 years parts and labor on all components.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor


Scotsman®

101 Corporate Woods Parkway, Vernon Hills, IL 60061

1-800-SCOTSMAN | Fax: 847-913-9844 | www.scotsman-ice.com | customer.relations@scotsman-ice.com

UC0918 - 90 lb Self-Contained Ice Machine


Self-Contained Under Counter Cuber with Storage

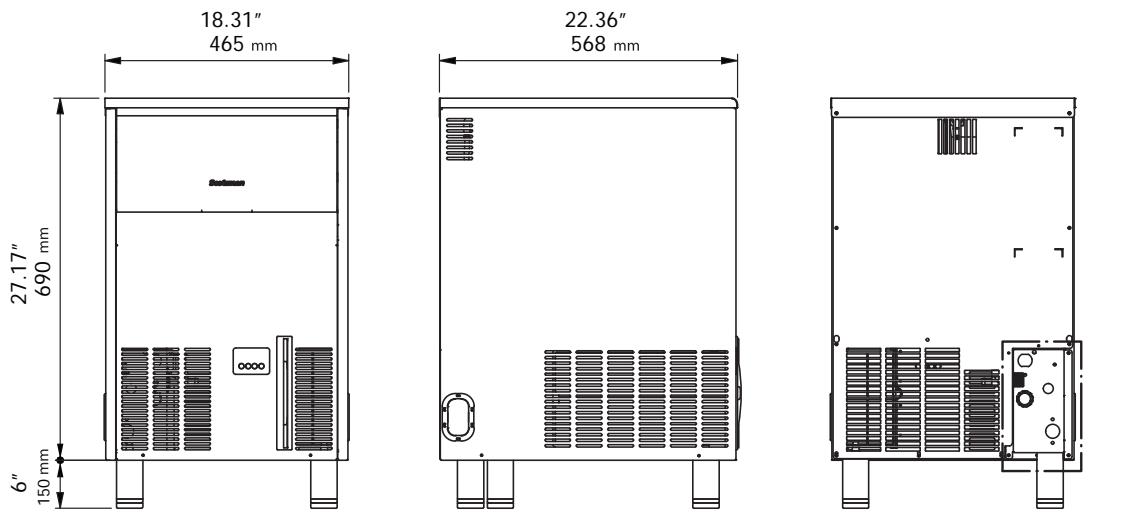

*Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections

**Height includes 6" adjustable legs

- ① Power Cord
- ② 3/4" Water Inlet
- ③ 25/32" Water Drain

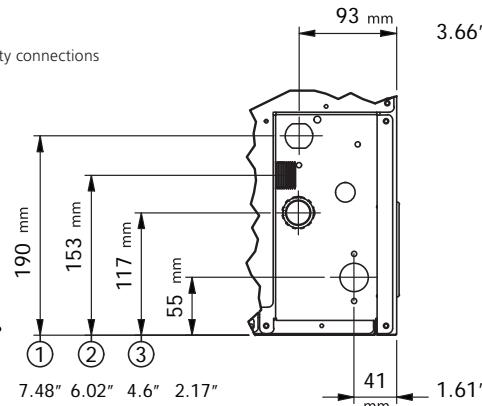

Specifications

Model Number	Condenser Unit	Storage Capacity lb/kg	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable Water Usage Gallons/100 lb (liters/45.4 kg) 90°F(32°C)/70°F(21°C)
UC0918GAX-1	Air	33/15	115/60/1	15	2	Cord	9.6	32/121



All Models

Dimensions (W x D x H):

Unit: 18.31" X 22.36" X 33.17"
(46.5 x 56.8 x 84 cm)

Includes 6" (15.24 cm) adjustable legs

Shipping Carton: 17" x 27" x 38"
(43.2 x 68.6 x 96.5 cm)

Shipping Weight: 90 lb / 41 kg

BTUs per hour: 2,300

Refrigerant: R290A



Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	15 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.