

The Scotsman logo is displayed in a bold, dark blue font. It is positioned within a large circular graphic that is partially blue and partially grey.

ERC Remote Condensers

Air Cooled Remote Condensers



Features

- Operate in wide outdoor temperature range from -20°F to 120°F.
- Single or double circuit for single or double unit installations.
- Heavy gauge galvanized steel for corrosion resistance.
- Thermally protected fan motors.
- PVC coated steel fan guards.
- Direct drive fan blades.
- Maximizes ice production by dissipating heat away from machine.
- Minimizes air conditioning load.


Compatible with Remote Cube, Nugget and Flake Ice Machine Models



Cube Ice



Nugget Ice

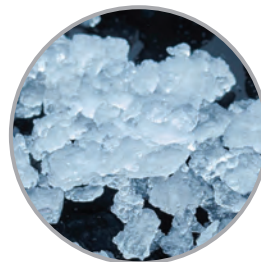

Flake Ice



Line Sets

Choice of insulated, refrigerant line sets. Brazing required. Available in 10ft, 25ft, 40ft and 75ft lines. Please consult ice machine users manual for installation guidelines.



Certification



Warranty

- 3 years parts and labor on all components.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor

The Scotsman logo is displayed in a bold, dark blue font.


101 Corporate Woods Parkway, Vernon Hills, IL 60061

1-800-SCOTSMAN | Fax: 847-913-9844 | www.scotsman-ice.com | customer.relations@scotsman-ice.com

ERC Remote Condensers

ERC Remote Condensers

Air Cooled Remote Condensers

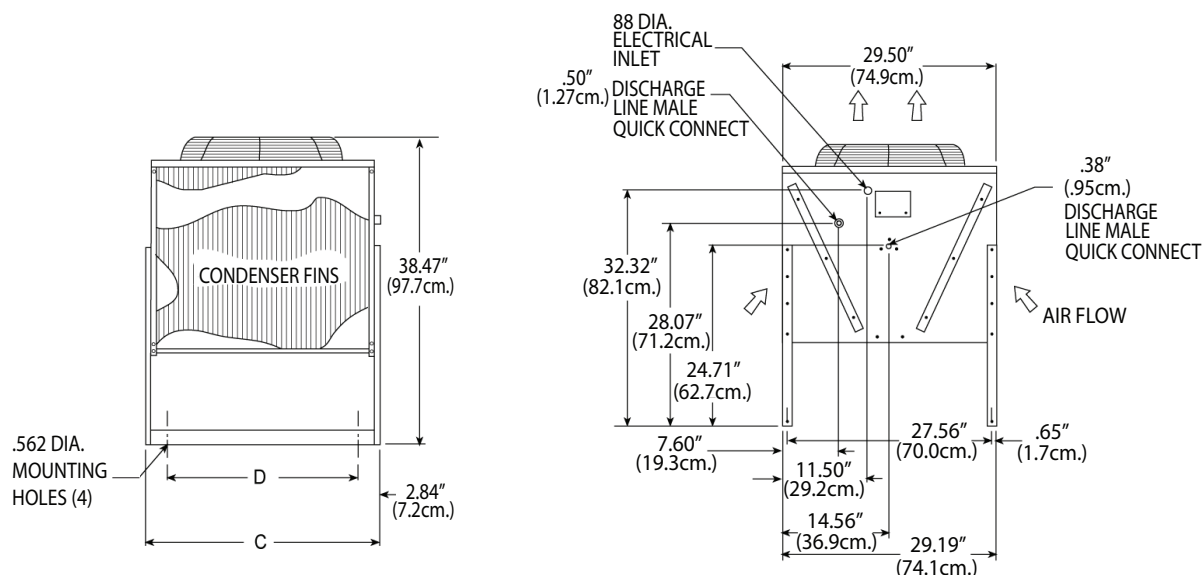

Operating Requirements: Electrical Voltage Min. -10% Max. +10%



Specifications

Model Number	Overall Length (C)	Mounting Hole Spacing (D)	Basic Electrical Volts/Hz/Phase	Circuit Wires	Min. Circuit Ampacity	Contains Headmaster?
ERC111X-1	29.125"	23.54"	115/60/1	2	3.4	Yes
ERC311X-1	29.125"	23.54"	115/60/1	2	1.25	Yes
ERC311X-32	29.125"	23.54"	208-230/60/1	2	1.25	Yes
ERC611X-32	37.75"	32.16"	208-230/60/1	2	3.8	Yes

Note: All units have a galvanized finish, are 29.5" wide and 38.5" high with legs. These units are designed to be powered by the ice machine they are connected to. The minimum circuit ampacity and maximum fuse size of the ice machine includes the requirements of the remote condenser.



Shipping

Model Number	Shipping Carton W x D x H	Shipping Weight
ERC111X-1	32" x 31" x 34" (81.3 x 78.7 x 86.4 cm)	95 lb / 43 kg
ERC311X-1	32" x 34" x 34" (81.3 x 86.4 x 86.4 cm)	130 lb / 59 kg
ERC311X-32	32" x 34" x 34" (81.3 x 86.4 x 86.4 cm)	130 lb / 59 kg
ERC611X-32	31" x 33" x 39" (78.7 x 83.8 x 99.1 cm)	140 lb / 64 kg



Accessories

Model Number	Description
BRT10	10ft (3.0 m) line set, brazing required
BRT25	25ft (7.6 m) line set, brazing required
BRT40	40ft (12.2 m) line set, brazing required
BRT75	75ft (22.9 m) line set, brazing required
KTE4	Tube end kit - contains 4 quick connect fittings for any RTE line set
BRT25	25ft (7.6 m) line set, brazing required. Use with MC2648 remote cooled units.
BRT40	40ft (12.2 m) line set, brazing required. Use with MC2648 remote cooled units.
BRT75	75ft (22.9 m) line set, brazing required. Use with MC2648 remote cooled units.
KTEL4	Tube end kit - contains 4 quick connect fittings for RTE tubing.
KERCF	Air filter for ERC111 or ERC311.