



UC2024 - 200 lb Cube Ice Machine

Self-Contained Undercounter Ice Machine with Storage

Features and Benefits

Space Saving Design:

- Only 24" wide, this ice maker can be placed in the tightest locations
- Front breathing - No side clearance required for flexible placement
- Recessed utility chase provides clearance for tight installs
- Optional floor mount kit lowers height to 33.5"

Ease of Use:

- Removable external air filter for easy cleaning
- Unit specific QR code for quick access to service manuals, cleaning guides and warranty history
- Ergonomic slide back door allows easy access to ice in the bin
- Power cord, NEMA 5-15P plug, ice scoop and adjustable legs are included for quick and easy installation

Reliability:

- Heavy duty, rust-free front panel and corrosion-resistant aluminum alloy side panels for maximum lifespan
- 3 Year parts and labor warranty
- Designed, engineered and assembled in the USA

High Production:

- Produces up to 230 lb (104 kg) per day and stores 80 lb (36 kg), maximizing ice output despite its small footprint

Environmentally Friendly:

- Low Energy Consumption
- Non-ozone depleting R290 refrigerant



Front Accessible External Air Filter for Easy Cleaning



Recessed Utility Chase Provides Clearance for Tight Installs



Ergonomic Slide Back Door Allows Easy Access to Ice in the Bin



Unit Specific QR Code for Quick Access to Service Manuals, Cleaning Guides and Warranty History



24 Hour Volume Production

Air Cooled		Water Cooled		
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water
227/103 lb/kg		166/75 lb/kg	230/104 lb/kg	90°F/32°C 70°F/21°C



Cube Ice

Common ice form, ideal for mixed drinks.



Small Cube
7/8" x 7/8" x 3/8"
(2.22 x 2.22 x .95 cm)



Medium Cube
7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)



Certification





Warranty

- 3 years parts and labor on all components
- 5 years parts on the compressor
- Warranty valid in North, South & Central America for commercial installations
- Contact factory for warranty in other regions
- Residential Applications: 1 year parts and labor




UC2024 - 200 lb Cube Ice Machine

Self-Contained Undercounter Ice Machine with Storage

UC2024 - 200 lb Self-Contained Ice Machine

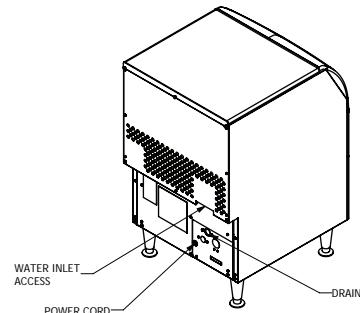

Front Breathing and No Side Clearance Required, Allowing for Flexible Placement

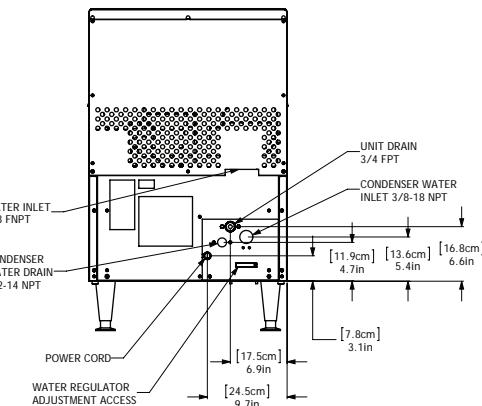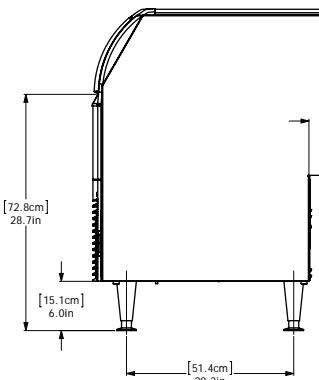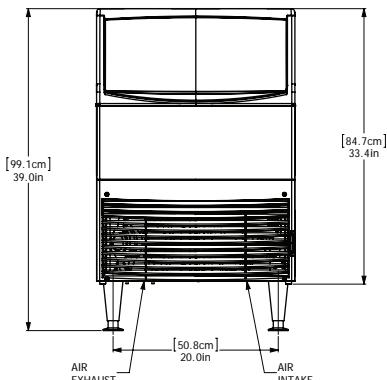

Specifications

Model Number	Condenser Unit	Storage Capacity	Basic Electrical	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Water Usage		
							kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Gallons/100 lb (liters/45.4 kg) 90°F(32°C)/70°F(21°C)	Energy Star®
UC2024MAX-1	Air	80/36	115/60/1	15	2	Cord	5.64	23.7/90.2	-
UC2024MWX-1	Water	80/36	115/60/1	15	2	Cord	4.42	21.8/83.0	136.9/521.3
UC2024SAX-1	Air	80/36	115/60/1	15	2	Cord	5.64	23.7/90.2	-
UC2024SWX-1	Water	80/36	115/60/1	15	2	Cord	4.42	21.8/83.0	136.9/521.3



All Models

Dimensions (W x D x H):

Unit: 24" X 28.5" X 39" (61.0 x 72.4 x 99.1 cm)

Height includes 6" (15.24 cm) adjustable legs

Shipping Carton: 29" x 39" x 39" (73.7 x 99.1 x 99.1 cm)

Shipping Weight: 150 lb / 68 kg BTUs per hour: 3,900

Model Number	Refrigerant	Refrigerant Charge (oz)
UC2024MAX-1	R290	5.25
UC2024MWX-1	R290	4.5
UC2024SAX-1	R290	5.25
UC2024SWX-1	R290	4.5



Accessories

Model Number

KLP8S
KBC1
KUFM24

Description

Kit, Leg 6", Stainless Steel
Kit, Casters
Floor mount kit. Lowers height to 33.5"

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.