





ECC1200 remote condensing unit



Eclipse System connected to single remote CP & condenser

EH330 - 1400lb Cube Ice Machine

Prodigy Plus® Eclipse® Remote Cooled Modular Cube Ice Machine

The world's smartest cuber.

As the world's only self-monitoring cuber, the new Scotsman Prodigy Plus® cube ice machines make it easier than ever to maintain your equipment and save money. Whether it's the advanced ice level control or an optional feature board for quick diagnostics, this is ice-making re-imagined. And with intuitive technology like AutoAlert™ indicator lights, a reduced operational footprint and easy-access service from the front panel, Prodigy Plus® cubers are simply the smartest, most reliable way to create fresh-tasting ice — every time.

The Prodigy Plus® difference.

- AutoAlert™ indicator lights for better visibility
- Operational footprint among the industry's smallest
- Industry-exclusive QR code instantly connects users to service information and warranty history
- One-touch cleaning reduces labor costs and saves time
- Front-located air filter for more efficient operation
- Self-aligning front panel for easy access to key components
- Patented WaterSense purge control automatically reduces scale buildup
- Patented Harvest Assist efficiently moves cube ice to the bin
- Smart-Board™ advanced feature module available for additional diagnostic capabilities
- Optional Vari-Smart™ ice level control allows operators to customize ice levels
- Antimicrobial protection guards internal surfaces between cleanings
- A full range of water- and energy-saving features



24 Hour Volume Production

EH		
70°F/21°C 50°F/10°C	90°F/32°C 70°F/21°C	
1411/641 lb/kg	1103/500 lb/kg	



Dispenser Options

Dimensions W" x D" x H"	Capacity lb/kg	Finish	Ship Weight lb/kg
30 x 30 x 35	200/91	Stainless Steel	200/91
30 x 30 x 40	250/114	Stainless Steel	300/136
30 x 30 x 40	255/116	Stainless Steel	350/159
	W" x D" x H" 30 x 30 x 35 30 x 30 x 40	W" x D" x H" lb/kg 30 x 30 x 35 200/91 30 x 30 x 40 250/114	Dimensions Capacity Ib/kg Finish 30 x 30 x 35 200/91 Stainless Steel 30 x 30 x 40 250/114 Stainless Steel

^{*} Contact Scotsman for bin top requirements










- 3 years parts and labor on all components.
- 5 years parts and labor on the evaporator.
- 5 years parts on the compressor and condenser. • Warranty valid in North, South & Central
- for commercial installations. America • Contact factory for warranty in other regions.
- · Residential Applications: 1 year parts and labor



- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •

Prodigy Plus® Eclipse® Remote Cooled Modular Cube Ice Machine

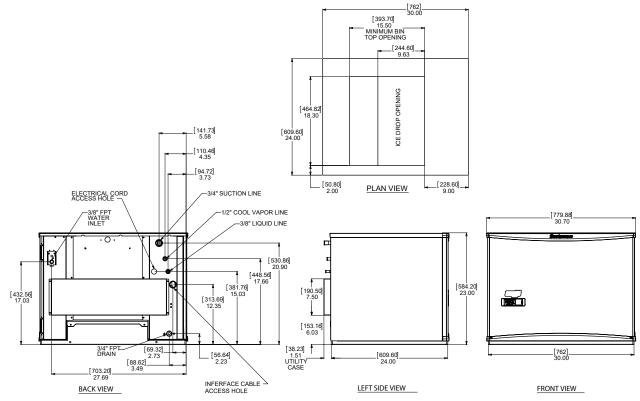



Specifications

Model Number	Condenser Unit	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Gallons/100 Potable	r Usage lb (liters/45.4 kg) Condenser C)/70°F(21°C)
EH330SL-1	-	115/60/1	15	2	Cord	4.55	-	-
-	ECC1200-32	208-230/60/1	30	2	17.7	5.00	18.0/68.1	-



All Models

Dimensions	(W	x D	Х	H):
------------	----	-----	---	-----

EH330 Unit: 30" x 24" x 23"

(76.2 x 61.0 x 58.4 cm)

Shipping Carton: 33.5" x 27.5" x 28"

(85.1 x 70.0 x 71.1 cm)

Condenser Unit: 30" x 18" x 35"

(76.2 x 45.7 x 88.9 cm)

Shipping Carton: 42" x 34" x 45"

(106.7 x 86.4 x 114.3 cm)

Shipping Weight: EH330xL 175 lb / 80 kg

ECC1200 310 lb / 141 kg

BTUs per hour: 19,000 (EH330)

Refrigerant: R-404A



Accessories

Model Number	Description
KVS	Vari-Smart™ Ice Level Control - Program ice bin levels to match ice needs.
KSBU	Smart-Board™ Advanced Control - Use additional operational data for fast diagnosis.
KSBU-N	Smart-Board™ Advanced Control with Network - Network capable.
3BRTE20-EH	Line set, 20 ft. Refrigerant and brazing required
3BRTE35-EH	Line set, 35 ft. Refrigerant and brazing required
3BRTE50-EH	Line set, 50 ft. Refrigerant and brazing required
3BRTE75-EH	Line set, 75 ft. Refrigerant and brazing required

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

	Minimum	Maximum	
Air Temperatures	50°F (10°C)	100°F (38°C)	
Water Temperatures	40°F (4.4°C)	100°F (38°C)	
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)	
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)	
Electrical Voltage	-5%	+10%	

Specifications and design are subject to change without notice.





^{• 101} Corporate Woods Parkway, Vernon Hills, IL 60061

^{• 1-800-}SCOTSMAN Fax: 847-913-9844

[•] www.scotsman-ice.com customer.relations@scotsman-ice.com

^{© 2021} Scotsman Ice Systems.