

UN1520 - 150 lb Nugget Ice Machine

Self-Contained Undercounter Ice Machine with Storage





Sealed, maintenance-free bearings ensure maximum reliability and contribute to a long machine life



Unit specific QR code for quick access to service manuals, cleaning guides and warranty history

Features and Benefits

Reliability:

- Sealed, maintenance-free bearings for reduced preventative maintenance and long-lasting performance
- Stainless steel evaporator and auger for maximum durability
- Heavy duty, rust-free front panel and corrosion-resistant aluminum alloy side panels for maximum lifespan
- 3 Year parts and labor warranty
- Designed, engineered and assembled in the USA

Space Saving Design:

- Only 20" wide, this ice maker can be placed it the tightest locations
- Front breathing No side clearance required for flexible placement
- Optional floor mount kit allows for installation under 34" ADA counter tops

Ease of Use:

- Unit specific QR code for quick access to service manuals, cleaning guides and warranty history
- Ergonomic slide back door allows easy access to ice in the bin
- Power cord, NEMA 5-15P plug, ice scoop and adjustable legs are included for quick and easy installation

High Production:

- Produces up to 167 lb (76 kg) per day and stores 57 lb (26 kg), maximizing ice output despite its small footprint
- Maximized production ensures that you can keep up with growing demand for The Original Chewable® Nugget Ice

Environmentally Friendly:


- Energy Star certified
- Meets US Safe Drinking Act low lead requirements
- Non-ozone depleting R290 refrigerant



Ergonomic slide back door allows easy access to ice in the bin



ADA compliant with optional floor mount kit

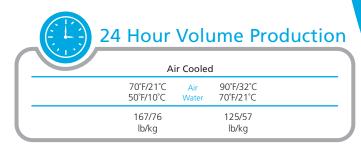








- 3 years parts and labor on all components
- Warranty valid in North, South & Central America for commercial installations
- Contact factory for warranty in other regions
- Residential Applications: 1 year parts and labor




- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •






Front breathing and no side clearance required, allowing for flexible placement



Recommended Minimum Clearance: Side: 1/8" Top: 1/4"





Specifications

| Model Number | Condenser Unit | Storage Capacity lb/kg | Basic Electrical Volts/Hz/Phase | Max. Fuse Size or HACR Circuit Breaker (amps) | Circuit Wires | Min. Circuit Ampacity | Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C) | Potable Water Usage Gallons/100 lb (liters/45.4 kg) 90°F(32°C)/70°F(21°C) |
|-----------------|-------------------|------------------------------|------------------------------------|---|------------------|--------------------------|---|---|
| UN1520A) | K-1 Air | 57/26 | 115/60/1 | 15 | 2 | Cord | 5.23 | 12/45.5 |



All Models

Dimensions (W x D x H):

Unit: 20" X 24" X 38"

(50.8 x 61.0 x 96.5 cm)

Includes 6" (15.24 cm) adjustable legs

Shipping Carton: 22" x 27" x 38"

(55.9 x 68.6 x 96.5 cm)

Shipping Weight: 129 lb / 59 kg

BTUs per hour: 4,100 Refrigerant: R290 Refrigerant Charge (oz): 3.00



Accessories

| Model Number | Description | |
|--------------|--|--|
| KLP8S | Kit, Leg 6", Stainless Steel | |
| KBC1 | Kit, Casters | |
| KUFM20 | For ADA applications. Floor mount kit lowers overall height to 31.9" | |

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

| | Minimum | Maximum | |
|--------------------|-------------------|-------------------|--|
| Air Temperatures | 50°F (10°C) | 100°F (38°C) | |
| Water Temperatures | 40°F (4.4°C) | 100°F (38°C) | |
| Water Pressures | 20 PSIG (1.4 bar) | 80 PSIG (5.5 bar) | |
| Electrical Voltage | -5% | +10% | |

Specifications and design are subject to change without notice.



- 1-800-SCOTSMAN Fax: 847-913-9844
- www.scotsman-ice.com customer.relations@scotsman-ice.com





